

Wednesday, Nov 26, 2025

Residential Siding Report

Imperial Measurements

Customer Information

1010 Hickory Nut Grove Ln Cary IL 60013

Roof estimate created from Aerial Imagery

Report Contents	
• Detail Roof summary (Structures Data Separated)	2
• South Elevation Analysis	3
• West Elevation Analysis	4
• North Elevation Analysis	5
• East Elevation Analysis	6
• Images	7

Report Summary



Total Length, Area and Pitch Summary

Total Area (Sqft)	2434
Horizontal Lap (Sqft)	2386
Brick (Sqft)	48
Outdoor Ceiling (Sqft)	0000
Starter Strip	- 237.9
Fascia/Soffit	- 272.0
Frieze Board	- 272.0
Brick	- 56.4
Door Wrap	- 37.0
Garage Wrap	- 31.0
Window Wrap	- 168.3
OutSide Corner	- 254.6
# of Windows	- 13
# of Doors	- 3
# of Garage Doors-	1

MAIN BUILDING (BREAK DOWN)

Total Area (Sqft)	2434
Starter Strip	- 237.9
Fascia/Soffit	- 272.0
Frieze Board	- 272.0
Brick	- 56.4
Door Wrap	- 37.0
Garage Wrap	- 31.0
Window Wrap	- 168.3
OutSide Corner	- 254.6

DETACHED BUILDING (BREAK DOWN)



Total Area (Sqft)	0
Starter Strip	- 0
Fascia/Soffit	- 0
Frieze Board	- 0
Misc Trim	- 0
Door Wrap	- 0
Garage Wrap	- 0
Window Wrap	- 0
OutSide Corner	- 0

PITCH TABLE Area (Sqft)

Pitch/Slope	Area
8:12	2434
Total	2434


Notes:

South Elevation Analysis

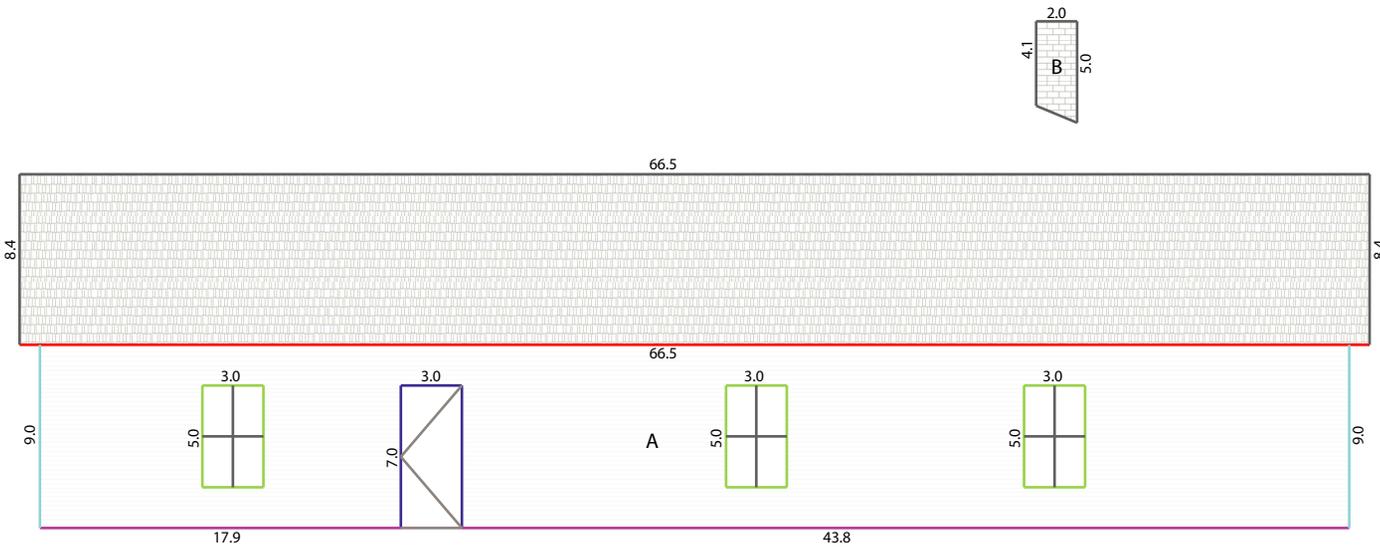


Plan	Area(sf)	Type
A	513.0 (sf)	HORZ
B	9.0 (sf)	BRICK
C	76.0 (sf)	HORZ
<hr/> Totals (sf) <hr/>		
Horizontal Lab	589.0	
Brick	9.0	

West Elevation Analysis

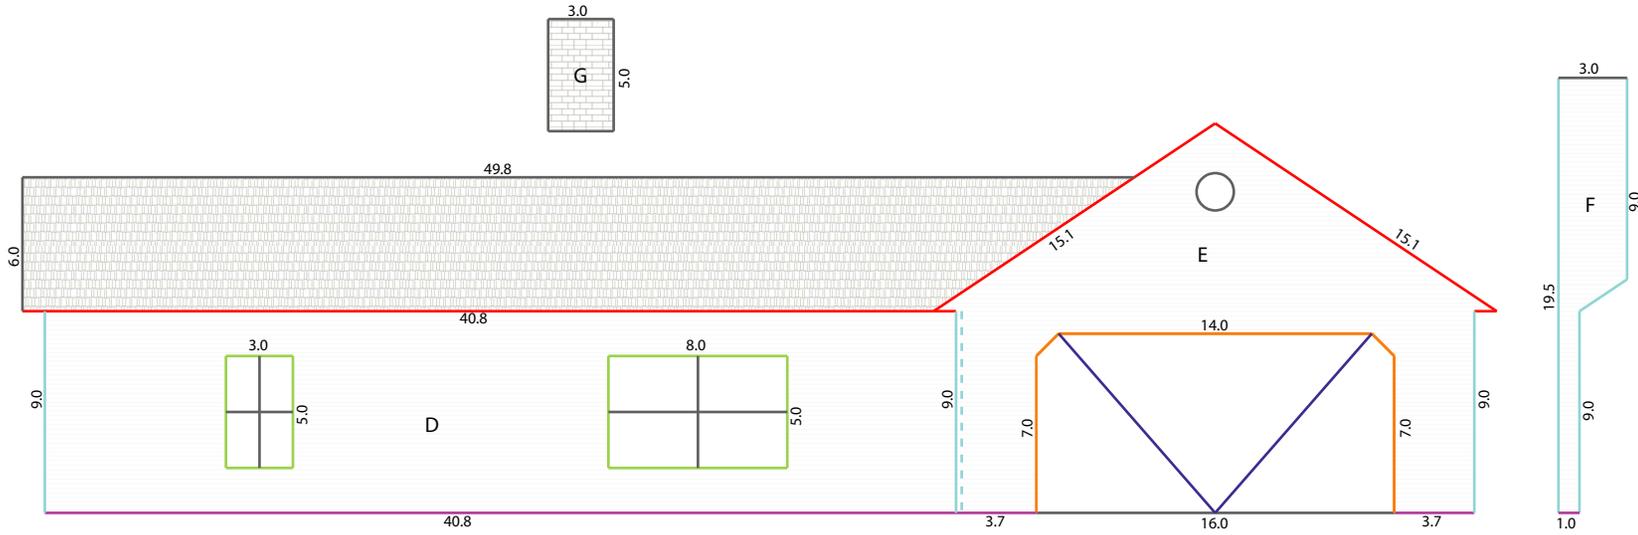


Plan	Area(sf)	Type
D	312.0 (sf)	HORZ
E	187.0 (sf)	HORZ
F	38.0 (sf)	HORZ
G	15.0 (sf)	BRICK
Totals (sf)		
Horizontal Lab	537.0	
Brick	15.0	

North Elevation Analysis

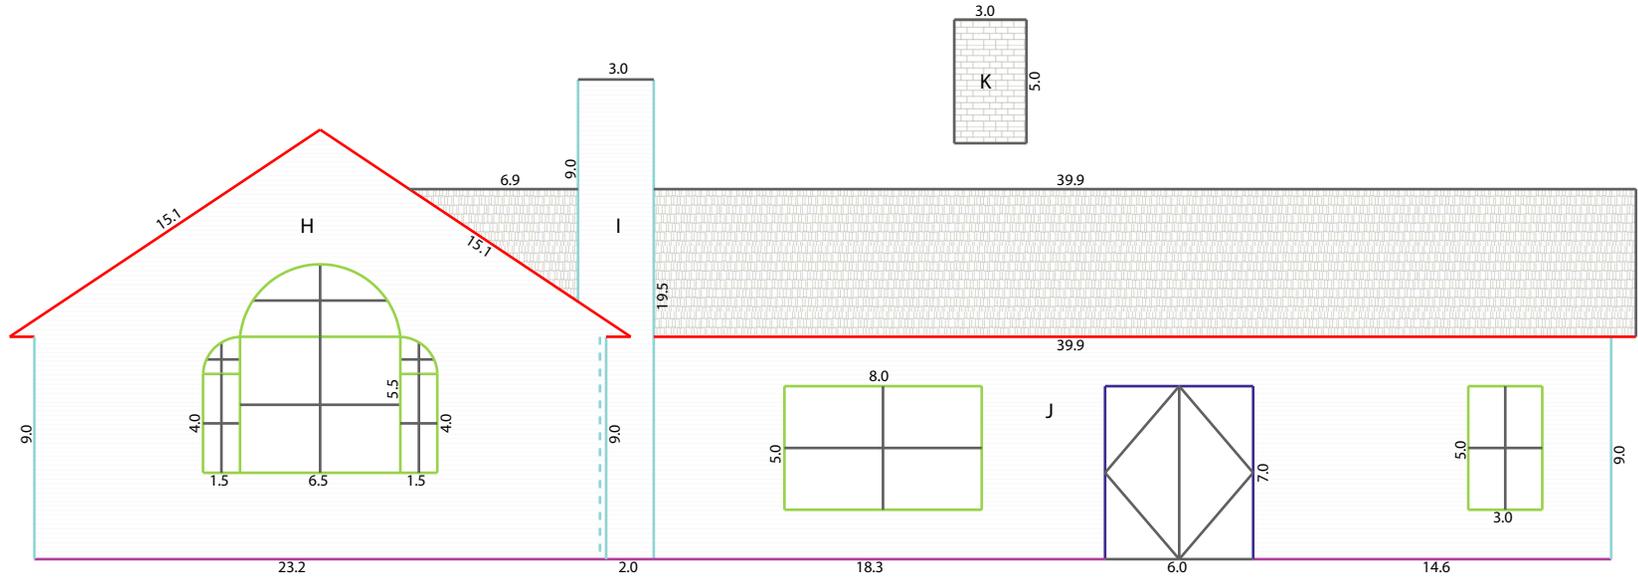

Plan	Area(sf)	Type
H	249.0 (sf)	HORZ
I	48.0 (sf)	HORZ
J	252.0 (sf)	HORZ
K	15.0 (sf)	BRICK
<u>Totals (sf)</u>		
Horizontal Lab	549.0	
Brick	15.0	

East Elevation Analysis

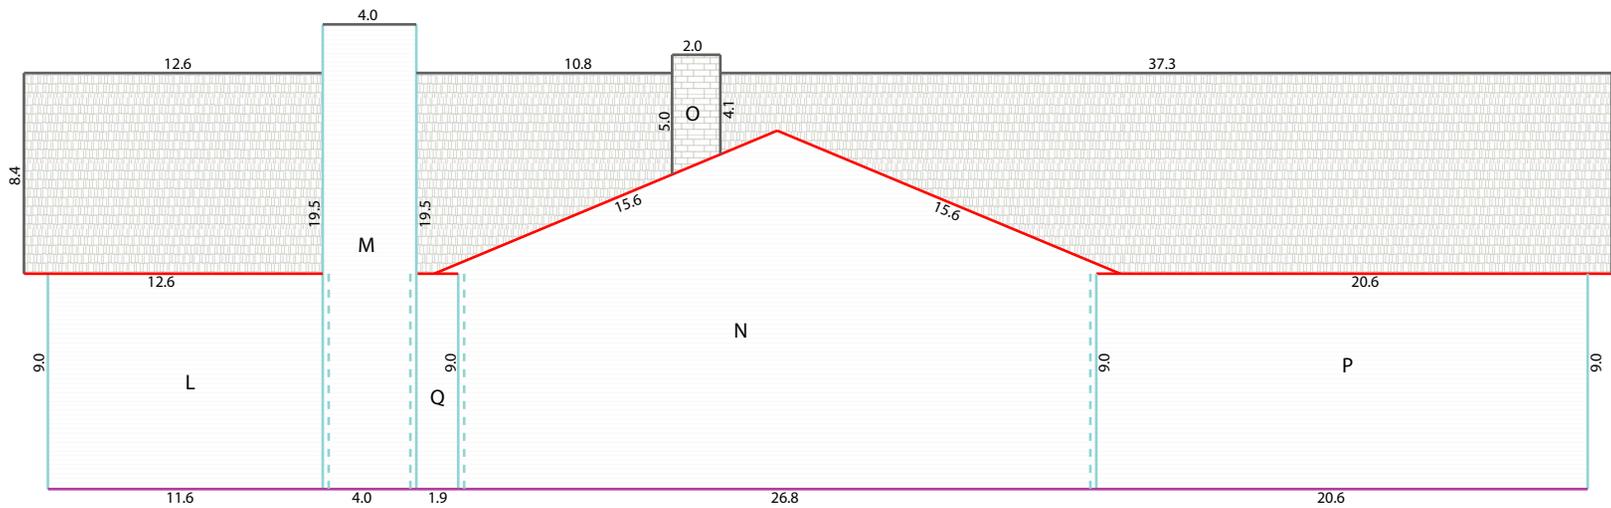

Plan	Area(sf)	Type
L	104.0 (sf)	HORZ
M	76.0 (sf)	HORZ
N	326.0 (sf)	HORZ
O	9.0 (sf)	BRICK
P	185.0 (sf)	HORZ
Q	20.0 (sf)	HORZ
Totals (sf)		
Horizontal Lab	711.0	
Brick	9.0	